


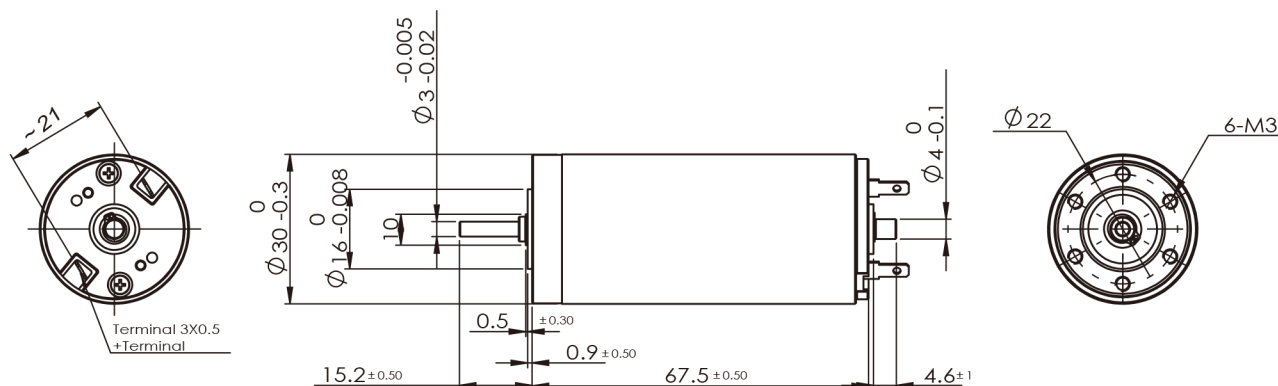


Motor Data

	Motor model			DR306812G	DR306824G	DR306836G	DR306848G	
1	Nominal voltage	V	V	12	24	36	48	
2	No load speed	rpm	Wnl	7900	8380	8500	8490	
3	No load current	mA	InI	350	170	150	100	
4	Nominal speed	rpm	Wc	7470	7600	7500	7690	
5	Nominal torque	mNm	Tc	51.6	85.6	86.6	89.7	
6	Nominal current	A	Ic	3.58	3.15	2.17	1.66	
7	Output power	W	Pc	40	68	69	72	
8	Stall torque	mNm	Tmax	865.2	669	781	918.9	
9	Stall current	A	Imax	60	24.6	19.6	17.08	
10	Max. efficiency	%	ηmax	90	80	85	88	
11	Terminal resistance	Ω	Rt	0.2	0.71	1.84	2.81	
12	Torque constant	mNm / A	Kt	14.4	27.2	39.9	53.8	
13	Speed constant	rpm / V	Kn	663	349	239	177.5	
14	Speed torque gradient	rpm / mNm	Δn / ΔT	8.3	9.1	11	8.9	
15	Terminal inductance	mH	L	0.036	0.23	0.48	0.588	
16	Rotor inertia	gcm ²	J	34.4	34.2	34.2	35.2	


Specifications

1	ambient temperature	Ta	-20~+65 °C
2	max. winding temperature	Tcoilmax	+85 °C
3	max. speed	Nmax	9350 rpm
4	axial play	Δt	0.05-0.15 mm
5	number of pole pairs	2p	1
6	number of commutator segments		13
7	weight of motor	Wt	260 g
8	Max. axial load (dynamic)		5.6N
9	Max. force for press fits (static)		110N
10	Max. radial load, 4 mm from flange		28N

Operating Range

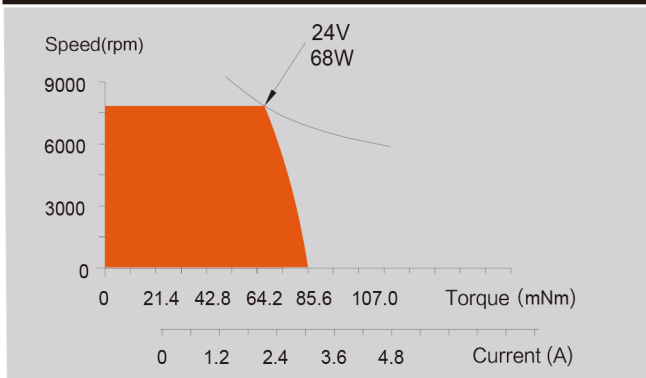

SMJ Modular System



Planetary Gearhead
 Model number P32H
 Outside Diameter φ32
 Torque 0.16~6N·m
 See page 50

Encoder
 1000 CPT
 3 Channels
 see page 46

MINDONG MECHANISM 42