


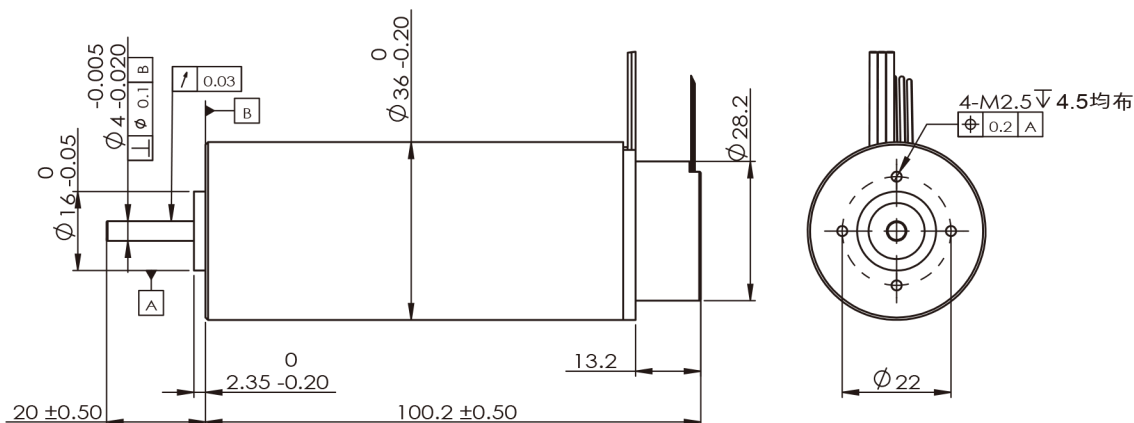


电机参数 Motor Data

1 电机型号	Motor model			SBR3610024B	SBR3610036B	SBR3610048B	
2 额定电压	Nominal voltage	V	V	24	36	48	
3 空载转速	No load speed	rpm	Wnl	28780	31600	33000	
4 空载电流	No load current	mA	InI	<315	<300	<226	
5 额定转速	Nominal speed	rpm	Wc	25000	28000	30000	
6 额定转矩	Nominal torque	mNm	Tc	83.5	88	69.3	
7 额定电流	Nominal current	A	Ic	10.5	8.1	5	
8 输出功率	Output power	W	Pc	219	258	218	
9 堵转扭矩	Stall torque	mNm	Tmax	2727.8	2058	2080.3	
10 堵转电流	Stall current	A	Imax	342.9	189.5	150	
11 最大效率	Max. efficiency	%	ηmax	84	85	87	
12 线间电阻	Terminal resistance	Ω	Rt	0.07	0.19	0.32	
13 线圈电感	Terminal inductance	L	mH	0.058	0.117	0.17	
14 力矩系数	Torque constant	mNm / A	Kt	7.96	10.86	13.87	
15 速度常数	Speed constant	rpm / V	Kn	1200.3	879.2	688.5	
16 速度扭矩比	Speed torque gradient	rpm / mNm	Δn / ΔT	45.2	40.9	43.3	

特性参数 Specifications

1 环境温度 ambient temperature	Ta	-20~+65 °C
2 最大允许线圈温度 max. winding temperature	Tcoilmax	+85 °C
3 最大允许速度 max. speed	Nmax	33000rpm
4 轴向窜动 axial play	Δt	0.05-0.15 mm
5 极对数 number of pole pairs	2p	1
6 换向器片数 number of commutator segments		3
7 马达重量 weight of motor	Wt	469g
8 最大轴向载荷 (动态) Max. axial load (dynamic)		5N
9 最大允许安装力 (静态) Max. force for press fits (static)		98N
10 最大径向载荷 (离法兰4mm处) Max. radial load, 4 mm from flange		25N

电机运行范围 Operating Range

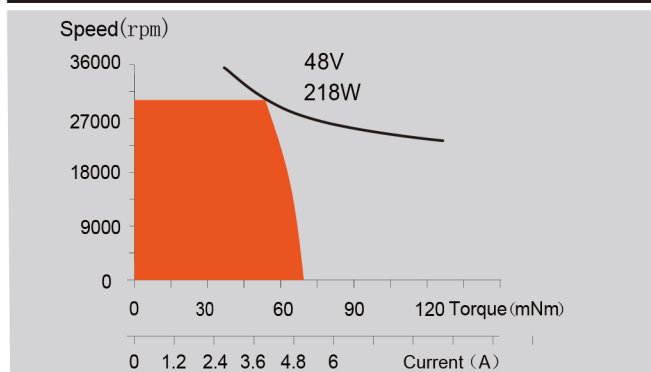

Terminal definitions

Green	U	1 +5V	Magnet Encoder 3 Channel 1000CPT
Black	V	2 GND	
Red	W	3 Channel A-	
		4 Channel A+	
		5 Channel B-	
		6 Channel B+	
		7 Channel Z-	
		8 Channel Z+	
		9 Hall3	
		10 Hall2	
		11 Hall1	