


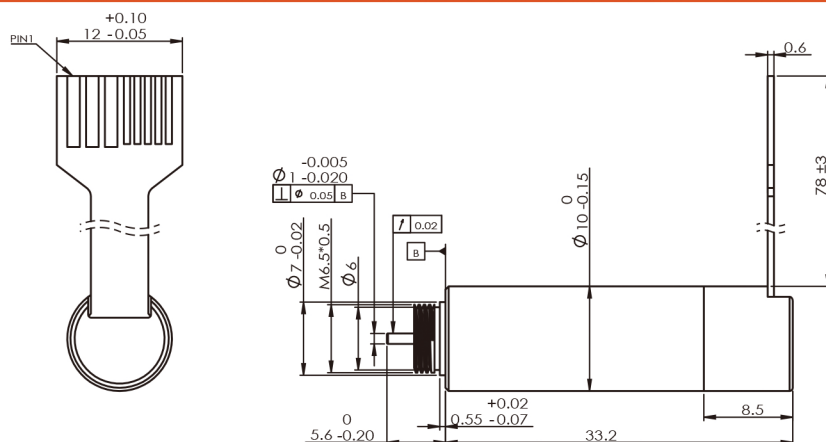


Motor Data

电机型号	Motor model			SBR103306B		
1 额定电压	Nominal voltage	V	V	6		
2 空载转速	No load speed	rpm	WnI	30000		
3 空载电流	No load current	mA	InI	<140		
4 额定转速	Nominal speed	rpm	Wc	27600		
5 额定转矩	Nominal torque	mNm	Tc	1.2		
6 额定电流	Nominal current	A	Ic	1.2		
7 输出功率	Output power	W	Pc	3.47		
8 堵转扭矩	Stall torque	mNm	Tmax	6		
9 堵转电流	Stall current	A	Imax	6.2		
10 最大效率	Max. efficiency	%	η_{max}	81		
11 线间电阻	Terminal resistance	Ω	Rt	1		
12 线圈电感	Terminal inductance	L	mH	0.03		
13 力矩系数	Torque constant	mNm / A	Kt	1		
14 速度常数	Speed constant	rpm / V	Kn	9356		
15 速度扭矩比	Speed torque gradient	rpm / mNm	$\Delta n / \Delta T$	8076		

Specifications

1 ambient temperature	Ta	-20~+65°C
2 Max.winding temperature	Tcoilmax	+85°C
3 Max.speed	Nmax	33000rpm
4 axial play	Δt	0.05~0.15mm
5 number of pole pairs	p	1
6 number of commutator segments		3
7 weight of motor	Wt	30g
8 Max.axial load(dynamic)		8N
9 Max.force for press fits(static)		15N
10 Max.radial load,4mm from flange		1.4N

Operating Range

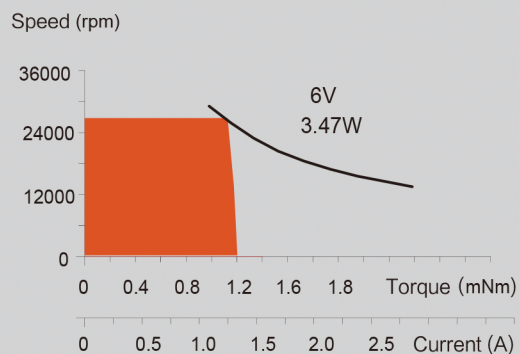

Terminal definitions

