


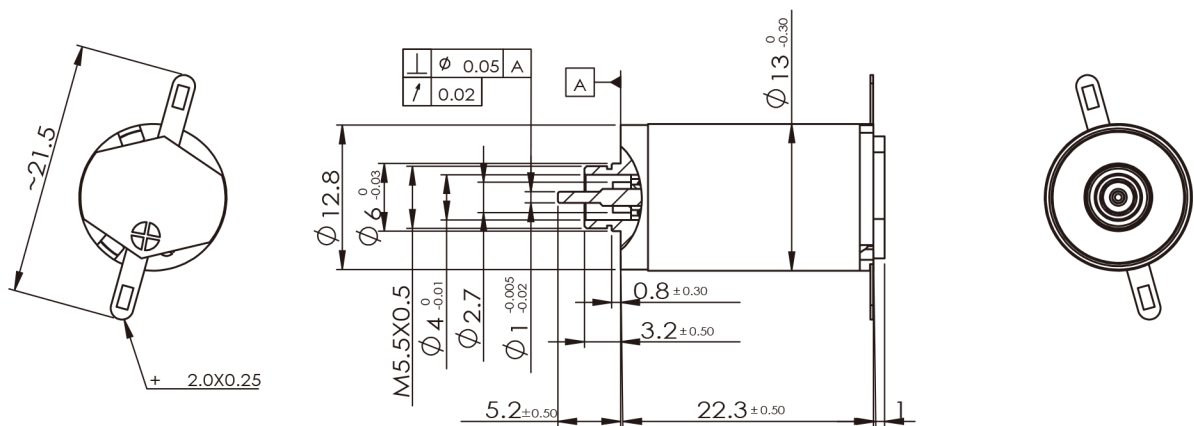


电机参数 Motor Data

电机型号	Motor model			DR132203B	DR132205B	DR132206B	DR132209B	DR132212B	DR132215B	DR132224B
1 额定电压	Nominal voltage	V	V	3	5	6	9	12	15	24
2 空载转速	No load speed	rpm	Wnl	12500	13000	12700	12500	13800	14500	15500
3 空载电流	No load current	mA	InI	92	48	48	36	28	22	15
4 额定转速	Nominal speed	rpm	Wc	8400	9970	7400	8300	8620	9380	11000
5 额定转矩	Nominal torque	mNm	Tc	1.32	1	1.31	1.29	1.27	1.28	1.24
6 额定电流	Nominal current	A	Ic	0.61	0.28	0.31	0.2	0.16	0.14	0.09
7 输出功率	Output power	W	Pc	1.16	1.06	1.02	1.13	1.15	1.26	1.42
8 堵转转矩	Stall torque	mNm	Tmax	3.61	3.9	3	3.44	3	3.3	3.7
9 堵转电流	Stall current	A	Imax	1.67	1.1	0.7	0.54	0.39	0.35	0.27
10 最大效率	Max. efficiency	%	ηmax	69	69	53	70	58	61	67
11 线间电阻	Terminal resistance	Ω	Rt	1.8	4.5	8.8	16.8	30.6	42.7	90.4
12 力矩系数	Torque constant	mNm / A	Kt	2.16	3.51	4.2	6.4	7.71	9.26	14
13 速度常数	Speed constant	rpm / V	Kn	4410	2717	2295	1488	1238	1031	684.5
14 速度转矩比	Speed torque gradient	rpm / mNm	Δn / ΔT	3112	2893	4113	3200	4079	3999	3687
15 线间电感	Terminal inductance	mH	L	0.19	0.102	0.152	0.8	0.63	0.878	1.9
16 转子转动惯量	Rotor inertia	gcm ²	J	0.3	0.32	0.32	0.32	0.31	0.32	0.32

特性参数 Specifications

1 环境温度	Ta	-20~+65 °C
ambient temperature		
2 最大允许线圈温度	Tcoilmax	+85 °C
max. winding temperature		
3 最大允许速度	Nmax	17050 rpm
max. speed		
4 轴向窜动	Δt	0.05-0.15 mm
axial play		
5 极对数	2p	1
number of pole pairs		
6 换向器片数		5
number of commutator segments		
7 马达重量	Wt	16 g
weight of motor		
8 最大轴向载荷 (动态)		0.8N
Max. axial load (dynamic)		
9 最大允许安装力 (静态)		15N
Max. force for press fits (static)		
10 最大径向载荷 (离法兰4mm处)		1.4N
Max. radial load, 4 mm from flange		

电机运行范围 Operating Range

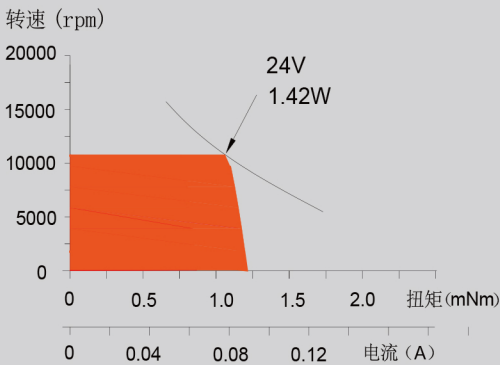

SMJ 配件 SMJ Modular System

